



Gooseneck Equipment Trailer 10K Tandem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 10,000 lb.
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	47"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook		

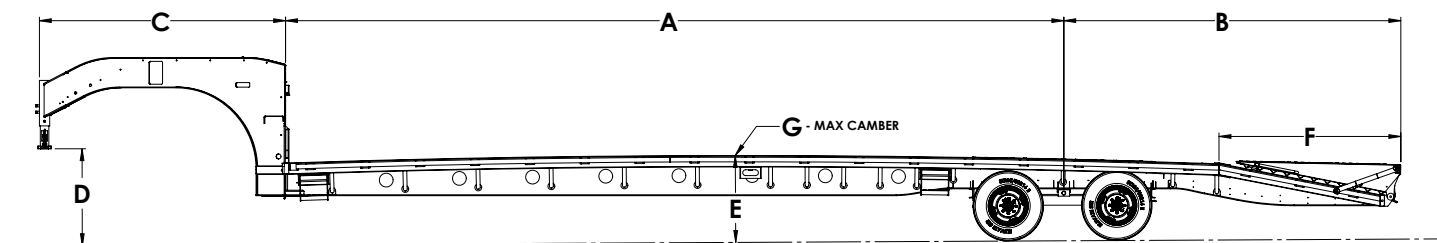

Dimensions

Model	A	B	C	D	E	F	G
ETGT10-22 BT	196.25"	147.375"	107.625"	40.25"	35.5"	79.125"	1.3125"
ETGT10-24 BT	220.25"	147.375"	107.625"	40.25"	35.75"	79.125"	1.625"
ETGT10-26 BT	244.25"	147.375"	107.625"	40.25"	36"	79.125"	1.875"
ETGT10-28 BT	268.25"	147.375"	107.625"	40.25"	36.25"	79.125"	2.1875"
ETGT10-30 BT	292.25"	147.375"	107.625"	40.25"	36.5"	79.125"	2.5625"
ETGT10-32 BT	316.25"	147.375"	107.625"	40.25"	37"	79.125"	2.875"
ETGT10-34 BT	340.25"	147.375"	107.625"	40.25"	37.5"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT10-22 BT	22' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	6,900 lb.	25,000 lb.	18,100 lb.
ETGT10-24 BT	24' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,225 lb.	25,000 lb.	17,775 lb.
ETGT10-26 BT	26' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,460 lb.	25,000 lb.	17,540 lb.
ETGT10-28 BT	28' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,730 lb.	25,000 lb.	17,270 lb.
ETGT10-30 BT	30' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,925 lb.	25,000 lb.	17,075 lb.
ETGT10-32 BT	32' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,170 lb.	25,000 lb.	16,830 lb.
ETGT10-34 BT	34' 10,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,400 lb.	25,000 lb.	16,600 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 10K Tandem Dual Wheel Hydraulic Beavertail




Standard Features

- Hydraulically Powered 12' Beavertail
- Hydraulic Front Jacks
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail, Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 10,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	Hydraulic 14,000 lb. Bolt-On, 2.50" Bore, 20" Stroke		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

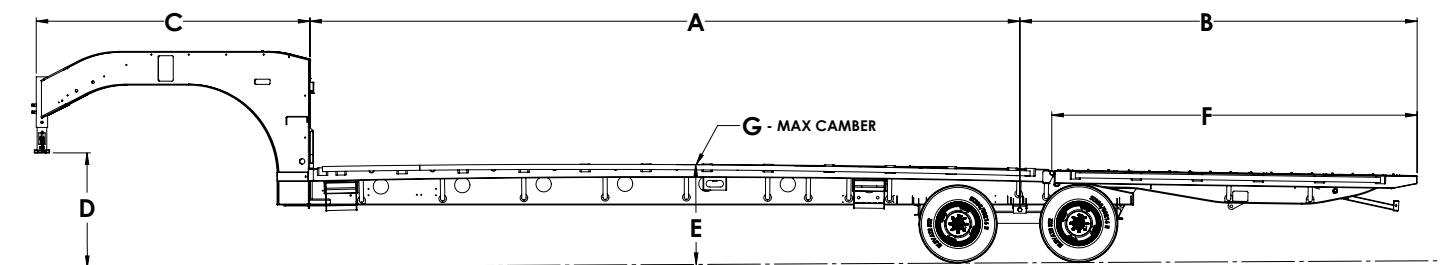

Dimensions

Model	A	B	C	D	E	F	G
ETGT10-28 HBT	183.5"	154.5"	107.625"	43.25"	38"	143.625"	0.6875"
ETGT10-32 HBT	231.5"	154.5"	107.625"	43.25"	38.25"	143.625"	1.125"
ETGT10-36 HBT	279.5"	154.5"	107.625"	43.25"	38.75"	143.625"	1.625"
ETGT10-40 HBT	327.5"	154.5"	107.625"	43.25"	39.5"	143.625"	2.25"
ETGT10-44 HBT	375.5"	154.5"	107.625"	43.25"	40"	143.625"	2.9375"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT10-28 HBT	28' 10,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	7,180 lb.	25,000 lb.	17,820 lb.
ETGT10-32 HBT	32' 10,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	7,585 lb.	25,000 lb.	17,415 lb.
ETGT10-36 HBT	36' 10,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	7,985 lb.	25,000 lb.	17,015 lb.
ETGT10-40 HBT	40' 10,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,385 lb.	25,000 lb.	16,615 lb.
ETGT10-44 HBT	44' 10,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,785 lb.	25,000 lb.	16,215 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 10K Tridem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(3) 10,000 lb.
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	41"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook		

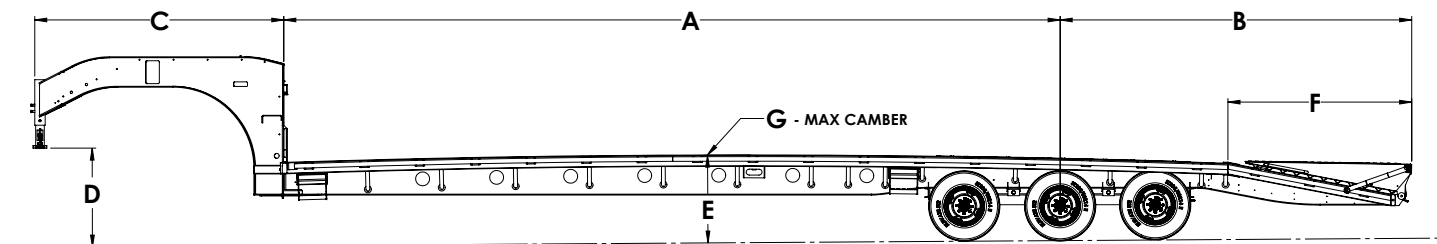

Dimensions

Model	A	B	C	D	E	F	G
ETGTR10-22 BT	192.375"	151.25"	107.625"	40.625"	35.75"	79.125"	1.3125"
ETGTR10-24 BT	216.375"	151.25"	107.625"	40.625"	36"	79.125"	1.625"
ETGTR10-26 BT	240.375"	151.25"	107.625"	40.625"	36.25"	79.125"	1.875"
ETGTR10-28 BT	264.375"	151.25"	107.625"	40.625"	36.5"	79.125"	2.1875"
ETGTR10-30 BT	288.375"	151.25"	107.625"	40.625"	36.75"	79.125"	2.5625"
ETGTR10-32 BT	312.375"	151.25"	107.625"	40.625"	37.5"	79.125"	2.875"
ETGTR10-34 BT	336.375"	151.25"	107.625"	40.625"	38"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR10-22 BT	22' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	7,700 lb.	30,000 lb.	22,300 lb.
ETGTR10-24 BT	24' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,065 lb.	30,000 lb.	21,935 lb.
ETGTR10-26 BT	26' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,245 lb.	30,000 lb.	21,755 lb.
ETGTR10-28 BT	28' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,608 lb.	30,000 lb.	21,392 lb.
ETGTR10-30 BT	30' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,710 lb.	30,000 lb.	21,290 lb.
ETGTR10-32 BT	32' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,970 lb.	30,000 lb.	21,030 lb.
ETGTR10-34 BT	34' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,170 lb.	30,000 lb.	20,830 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGTR10-22 BT	7,825 lb.	36,000 lb.	28,175 lb.
ETGTR10-24 BT	8,190 lb.	36,000 lb.	27,810 lb.
ETGTR10-26 BT	8,370 lb.	36,000 lb.	27,630 lb.
ETGTR10-28 BT	8,733 lb.	36,000 lb.	27,267 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGTR10-30 BT	8,835 lb.	36,000 lb.	27,165 lb.
ETGTR10-32 BT	9,095 lb.	36,000 lb.	26,905 lb.
ETGTR10-34 BT	9,295 lb.	36,000 lb.	26,705 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised April 2026



Gooseneck Equipment Trailer 12K Tandem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 12,000 lb.
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	48.5"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook		

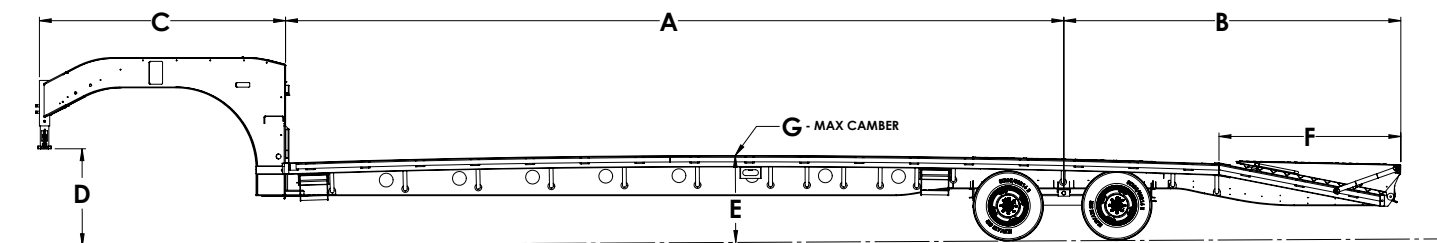

Dimensions

Model	A	B	C	D	E	F	G
ETGT12-22 BT	196.25"	147.375"	107.625"	40"	35"	79.125"	1.3125"
ETGT12-24 BT	220.25"	147.375"	107.625"	40"	35.25"	79.125"	1.625"
ETGT12-26 BT	244.25"	147.375"	107.625"	40"	35.5"	79.125"	1.875"
ETGT12-28 BT	268.25"	147.375"	107.625"	40"	35.75"	79.125"	2.1875"
ETGT12-30 BT	292.25"	147.375"	107.625"	40"	36.25"	79.125"	2.5625"
ETGT12-32 BT	316.25"	147.375"	107.625"	40"	36.5"	79.125"	2.875"
ETGT12-34 BT	340.25"	147.375"	107.625"	40"	37"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT12-22 BT	22' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,370 lb.	29,000 lb.	21,630 lb.
ETGT12-24 BT	24' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,590 lb.	29,000 lb.	21,410 lb.
ETGT12-26 BT	26' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,750 lb.	29,000 lb.	21,250 lb.
ETGT12-28 BT	28' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,990 lb.	29,000 lb.	21,010 lb.
ETGT12-30 BT	30' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,180 lb.	29,000 lb.	20,820 lb.
ETGT12-32 BT	32' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,400 lb.	29,000 lb.	20,600 lb.
ETGT12-34 BT	34' 12,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,680 lb.	29,000 lb.	20,320 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 12K Tandem Dual Wheel Hydraulic Beavertail




Standard Features

- Hydraulically Powered 12' Beavertail
- Hydraulic Front Jacks
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail, Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 12,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	Hydraulic 14,000 lb. Bolt-On, 2.50" Bore, 20" Stroke		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

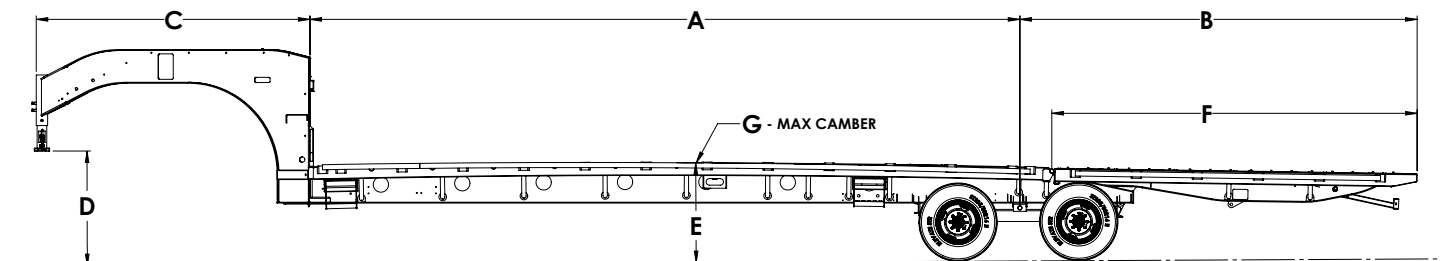

Dimensions

Model	A	B	C	D	E	F	G
ETGT12-28 HBT	182.5"	155.25"	107.625"	43"	37.25"	143.625"	0.6875"
ETGT12-32 HBT	230.5"	155.25"	107.625"	43"	37.75"	143.625"	1.125"
ETGT12-36 HBT	278.5"	155.25"	107.625"	43"	38.25"	143.625"	1.625"
ETGT12-40 HBT	326.5"	155.25"	107.625"	43"	38.75"	143.625"	2.25"
ETGT12-44 HBT	374.5"	155.25"	107.625"	43"	39.25"	143.625"	2.9375"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT12-28 HBT	28' 12,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	7,560 lb.	29,000 lb.	21,440 lb.
ETGT12-32 HBT	32' 12,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	7,960 lb.	29,000 lb.	21,040 lb.
ETGT12-36 HBT	36' 12,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,360 lb.	29,000 lb.	20,640 lb.
ETGT12-40 HBT	40' 12,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,760 lb.	29,000 lb.	20,240 lb.
ETGT12-44 HBT	44' 12,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,160 lb.	29,000 lb.	19,840 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 12K Tridem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(3) 12,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

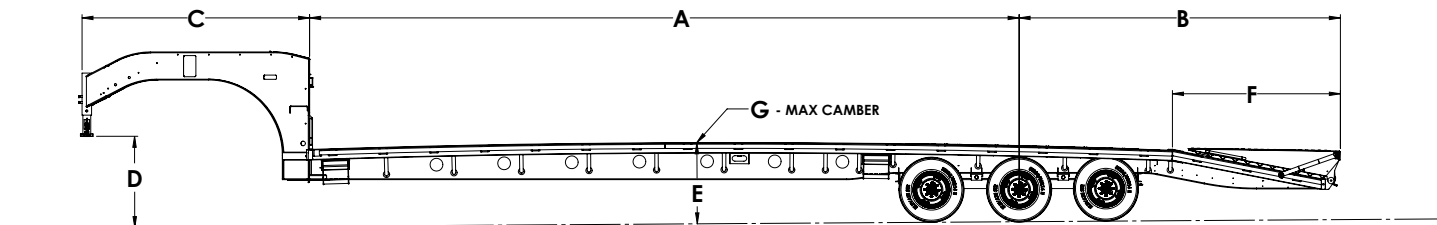

Dimensions

Model	A	B	C	D	E	F	G
ETGTR12-22 BT	192.375"	151.25"	107.625"	40.625"	35.25"	79.125"	1.3125"
ETGTR12-24 BT	216.375"	151.25"	107.625"	40.625"	35.5"	79.125"	1.625"
ETGTR12-26 BT	240.375"	151.25"	107.625"	40.625"	35.75"	79.125"	1.875"
ETGTR12-28 BT	264.375"	151.25"	107.625"	40.625"	36"	79.125"	2.1875"
ETGTR12-30 BT	288.375"	151.25"	107.625"	40.625"	36.5"	79.125"	2.5625"
ETGTR12-32 BT	312.375"	151.25"	107.625"	40.625"	37"	79.125"	2.875"
ETGTR12-34 BT	336.375"	151.25"	107.625"	40.625"	37.5"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR12-22 BT	22' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,135 lb.	30,000 lb.	21,865 lb.
ETGTR12-24 BT	24' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,500 lb.	30,000 lb.	21,500 lb.
ETGTR12-26 BT	26' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,680 lb.	30,000 lb.	21,320 lb.
ETGTR12-28 BT	28' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,043 lb.	30,000 lb.	20,957 lb.
ETGTR12-30 BT	30' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,145 lb.	30,000 lb.	20,855 lb.
ETGTR12-32 BT	32' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,405 lb.	30,000 lb.	20,595 lb.
ETGTR12-34 BT	34' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,605 lb.	30,000 lb.	20,395 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGTR12-22 BT	8,260 lb.	40,000 lb.	31,740 lb.
ETGTR12-24 BT	8,625 lb.	40,000 lb.	31,375 lb.
ETGTR12-26 BT	8,805 lb.	40,000 lb.	31,195 lb.
ETGTR12-28 BT	9,168 lb.	40,000 lb.	30,832 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGTR12-30 BT	9,270 lb.	40,000 lb.	30,730 lb.
ETGTR12-32 BT	9,530 lb.	40,000 lb.	30,470 lb.
ETGTR12-34 BT	9,730 lb.	40,000 lb.	30,270 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 16K Tandem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 16,000 lb
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	48.5"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Fir Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb, Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb 1/2" x 42.0" w/Clevis Slip Hook		

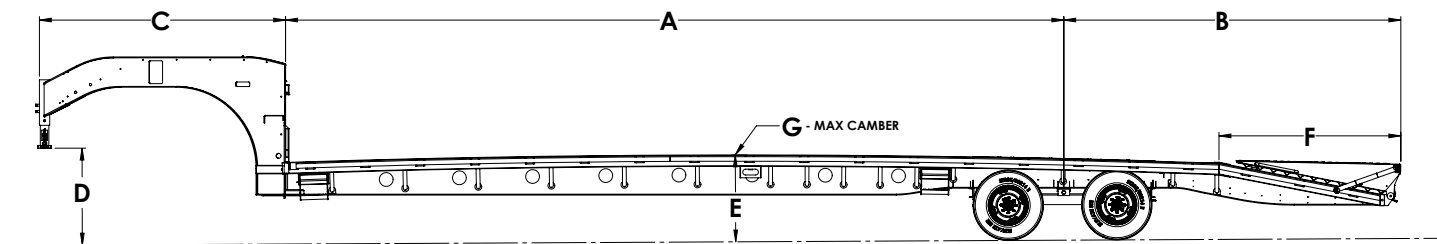

Dimensions

Model	A	B	C	D	E	F	G
ETGT16-22 BT	196.25"	147.375"	107.625"	39.25	34.25	79.125"	1.3125"
ETGT16-24 BT	220.25"	147.375"	107.625"	39.25	34.5	79.125"	1.625"
ETGT16-26 BT	244.25"	147.375"	107.625"	39.25	34.75	79.125"	1.875"
ETGT16-28 BT	268.25"	147.375"	107.625"	39.25	35	79.125"	2.1875"
ETGT16-30 BT	292.25"	147.375"	107.625"	39.25	35.5	79.125"	2.5625"
ETGT16-32 BT	316.25"	147.375"	107.625"	39.25	35.75	79.125"	2.875"
ETGT16-34 BT	340.25"	147.375"	107.625"	39.25	36.25	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT16-22 BT	22' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	7,985 lb.	30,000 lb.	22,015 lb.
ETGT16-24 BT	24' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	8,210 lb.	30,000 lb.	21,790 lb.
ETGT16-26 BT	26' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	8,430 lb.	30,000 lb.	21,570 lb.
ETGT16-28 BT	28' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	8,650 lb.	30,000 lb.	21,350 lb.
ETGT16-30 BT	30' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	8,870 lb.	30,000 lb.	21,130 lb.
ETGT16-32 BT	32' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	9,090 lb.	30,000 lb.	20,910 lb.
ETGT16-34 BT	34' 16,000 lb. Tandem Axle Dual Black Beaver tail w/ 6' HD Ramps	9,310 lb.	30,000 lb.	20,690 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGT16-22 BT	8,110 lb.	38,000 lb.	29,890 lb.
ETGT16-24 BT	8,335 lb.	38,000 lb.	29,665 lb.
ETGT16-26 BT	8,555 lb.	38,000 lb.	29,445 lb.
ETGT16-28 BT	8,775 lb.	38,000 lb.	29,225 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGT16-30 BT	8,995 lb.	38,000 lb.	29,005 lb.
ETGT16-32 BT	9,215 lb.	38,000 lb.	28,785 lb.
ETGT16-34 BT	9,435 lb.	38,000 lb.	28,565 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 16K Tandem Dual Wheel Hydraulic Beavertail




Standard Features

- Hydraulically Powered 12' Beavertail
- Hydraulic Front Jacks
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail, Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 16,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	Hydraulic 14,000 lb. Bolt-On, 2.50" Bore, 20" Stroke		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

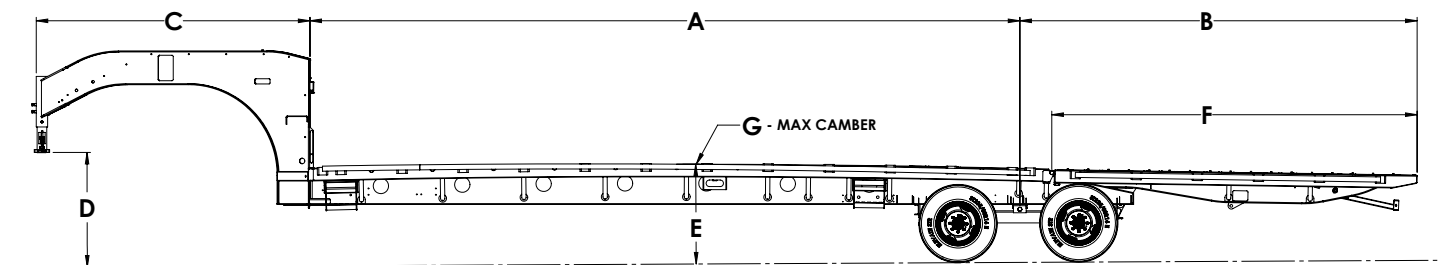

Dimensions

Model	A	B	C	D	E	F	G
ETGT16-28 HBT	182.5"	155.125"	107.625"	42.125"	36.625"	143.625"	0.6875"
ETGT16-32 HBT	230.5"	155.125"	107.625"	42.125"	37"	143.625"	1.125"
ETGT16-36 HBT	278.5"	155.125"	107.625"	42.125"	37.5"	143.625"	1.625"
ETGT16-40 HBT	326.5"	155.125"	107.625"	42.125"	38.125"	143.625"	2.25"
ETGT16-44 HBT	374.5"	155.125"	107.625"	42.125"	38.875"	143.625"	2.9375"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT16-28 HBT	28' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,300 lb.	30,000 lb.	21,700 lb.
ETGT16-32 HBT	32' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,705 lb.	30,000 lb.	21,295 lb.
ETGT16-36 HBT	36' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,105 lb.	30,000 lb.	20,895 lb.
ETGT16-40 HBT	40' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,505 lb.	30,000 lb.	20,495 lb.
ETGT16-44 HBT	44' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,905 lb.	30,000 lb.	20,095 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGT16-28 HBT	8,300 lb.	38,000 lb.	29,700 lb.
ETGT16-32 HBT	8,705 lb.	38,000 lb.	29,295 lb.
ETGT16-36 HBT	9,105 lb.	38,000 lb.	28,895 lb.
ETGT16-40 HBT	9,505 lb.	38,000 lb.	28,495 lb.
ETGT16-44 HBT	9,905 lb.	38,000 lb.	28,095 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026



Gooseneck Equipment Trailer 16K Tridem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(3) 16,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/75R17.5 H 16ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

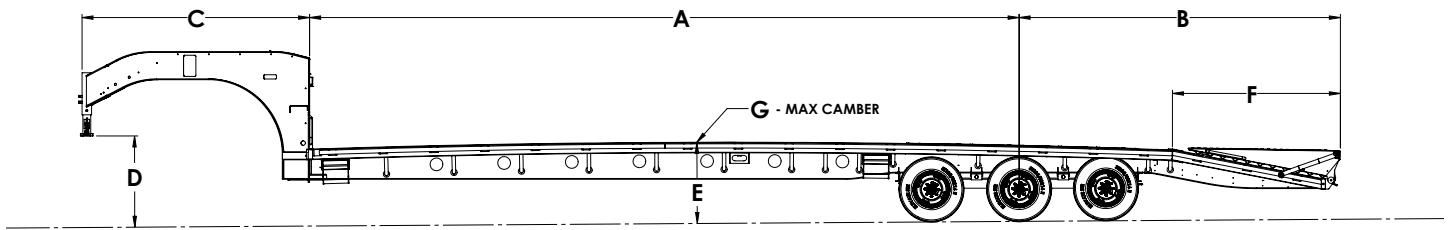

Dimensions

Model	A	B	C	D	E	F	G
ETGTR16-22 BT	192.375"	151.25"	107.625"	40.625"	34.5"	79.125"	1.3125"
ETGTR16-24 BT	216.375"	151.25"	107.625"	40.625"	35"	79.125"	1.625"
ETGTR16-26 BT	240.375"	151.25"	107.625"	40.625"	35.25"	79.125"	1.875"
ETGTR16-28 BT	264.375"	151.25"	107.625"	40.625"	35.5"	79.125"	2.1875"
ETGTR16-30 BT	288.375"	151.25"	107.625"	40.625"	36"	79.125"	2.5625"
ETGTR16-32 BT	312.375"	151.25"	107.625"	40.625"	36.5"	79.125"	2.875"
ETGTR16-34 BT	336.375"	151.25"	107.625"	40.625"	37"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR16-22 BT	22' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,985 lb.	30,000 lb.	21,015 lb.
ETGTR16-24 BT	24' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,350 lb.	30,000 lb.	20,650 lb.
ETGTR16-26 BT	26' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,530 lb.	30,000 lb.	20,470 lb.
ETGTR16-28 BT	28' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,893 lb.	30,000 lb.	20,107 lb.
ETGTR16-30 BT	30' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,995 lb.	30,000 lb.	20,005 lb.
ETGTR16-32 BT	32' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	10,255 lb.	30,000 lb.	19,745 lb.
ETGTR16-34 BT	34' 16,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	10,455 lb.	30,000 lb.	19,545 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGTR16-22 BT	9,110 lb.	40,000 lb.	30,890 lb.
ETGTR16-24 BT	9,475 lb.	40,000 lb.	30,525 lb.
ETGTR16-26 BT	9,655 lb.	40,000 lb.	30,345 lb.
ETGTR16-28 BT	10,018 lb.	40,000 lb.	29,982 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGTR16-30 BT	10,120 lb.	40,000 lb.	29,880 lb.
ETGTR16-32 BT	10,380 lb.	40,000 lb.	29,620 lb.
ETGTR16-34 BT	10,580 lb.	40,000 lb.	29,420 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026